

# Safety Briefing AG Fumagalli



# Background

- An annual safety instruction is compulsory by law
- Participation has to be confirmed by your signature
- Observing the safety regulations is a prerequisite for insurance coverage



# Part 1: General safety information

---

- safety in laboratories
- behavior in case of an emergency
- helpful link:

website of *Dienststelle Arbeitssicherheit*  
(only in German!)

[http://www.fu-berlin.de/sites/baas/grundpflichten\\_arbeitsschutz/arbschutzord/naturwissenschaften.html](http://www.fu-berlin.de/sites/baas/grundpflichten_arbeitsschutz/arbschutzord/naturwissenschaften.html)

# How to conduct in the laboratory



- do not **eat, drink** or perform **beauty care** in a laboratory

- no **alcohol**



- **smoking ban** within the building

- do not work **alone** if possible

- leave the **door open** if possible

# Get informed about safety installations

- fire-protection installations



*fire  
blanket*



*fire  
extinguisher*



*direction*



*fire  
hose*

- rescue installations




*emergency  
exit*



*first-aid  
kit*



*eye  
shower*



*emergency  
shower* <sup>5</sup>

# First aid facilities



- first aid kits are located in every laboratory
- every incident must be reported in the first-aid log book located within the first-aid kit



# Fire and health protection

- keep escape routes clean of fire loads
- put defective equipment immediately out of operation and report to *Hans Badow* or *Paul Fumagalli*



- our fire extinguishers: **A, B, C powder**
- if a **person** is on fire:
  - *immediately extinguish the fire (extinguisher is faster than a fire blanket)*
  - *danger of suffocation or frostbite by using a fire extinguisher is negligible! (keep 1 – 2 m distance)*

**A:** solids,  
**B:** fluids,  
**C:** gases

# How to act in case of an emergency

- keep calm!
- In case of fire, decide if you can extinguish the fire without endangering yourself
- warn endangered persons and get persons involved out of danger, shut fire doors, follow emergency routes



- report the emergency (fire, accident)

minor technical  
emergency:

**55555**



major  
emergency:

**112  
(55112)**

- provide first-aid assistance





# Emergency call




112  
(55112)

- **where** did it happen
- **phone number** for call-back
- **who** is reporting
- **what** has happened
- **how many** people injured
- **which** injuries occurred
- wait for **further inquiry**

# Meeting place in case of emergency (fire alarm)

- location: corner Takustr./Arnimallee
- escape in groups, help the injured, ascertain completeness
- keep escape routes free, instruct fire fighters and rescue teams

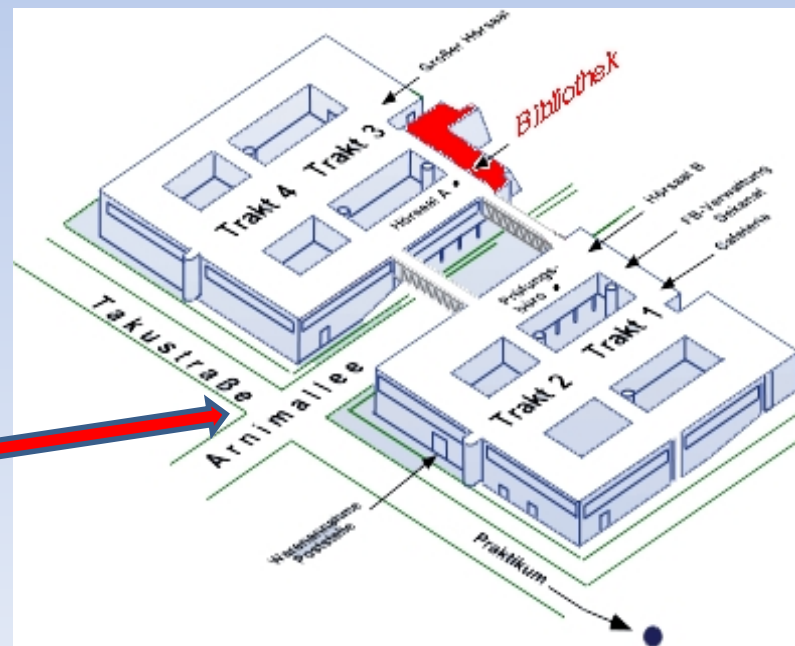

## Part 2: Hazard areas

1. electric circuits and high voltage
2. vacuum equipment
3. cooling water
4. cryogenic gases and liquids
5. gases and liquids under high pressure
6. high magnetic fields
7. laser exposure
8. x-ray exposure
9. chemical-waste disposal

# 1. Electric circuits and high voltage

**Note: we already had a severe accident in the MBE lab!**

- electric appliances must only be operated in faultless condition
- defective appliances must be discarded.
- maintenances on the electric power system (power outlets, switchboards, etc.) must only be performed by specialized staff.

**you must immediately report and remove safety-related shortcomings.**

# Hazards of electric currents

- danger of fire and toxic vapours
- a person can be harmed as follows:
  - **burnings**
  - **muscle cramps**
  - **unconsciousness**
  - **cardiac fibrillation, cardiac arrest**
  - **paralysis of respiration**
  - **state of shock**
  - **death**
- damage depends on
  - **intensity, path, duration** of current flow through human body
  - **frequency** of current
  - **health** constitution of the injured person

# Damage thresholds

- under awkward conditions, alternating voltages of approx. **70 V** can lead to deadly accidents!
- low frequencies  $\leq 100$  Hz are the most dangerous
- threshold for contact voltage  
**alternating voltage (AC): 50 V | direct voltage (DC): 120 V**
- hazard of DC currents less harmful than of AC current
- hazard decreases with increasing frequency

threshold	alternating current (50/60Hz)	direct current
perceptibility	0.5 – 1 mA	2 mA
cramp threshold	10 – 15 mA	300 mA
<b>fibrillation threshold</b>	<b>50 mA</b>	300 mA

# Location of high currents and high voltages in the laboratories

**MBE system:  
(0.1.38)**

Oxford evaporator, RHEED, SPA-LEED, AES, sputter gun, mass spectrometer, cold-cathode gauge, Ti sublimation pump, ion-getter pump, heating bands with temperature controller

**Balzers evaporation  
system (0.1.38)**

electron-beam evaporator, RHEED, mass spectrometer, cold-cathode gauge

**small evaporation  
system (0.1.38)**

electron-beam evaporator, cold-cathode gauge, heating bands

**optical setups:  
(0.1.38, 0.1.34, 0.1.13,  
0.1.42)**

photo-elastic modulator, photomultiplier, CCD camera

# Safety rules

- no open electric leads (attach a shielding!)
- replace defective cables immediately
- secure loose cables
- insulate neighboring energized leads
- pinpoint and mark hazardous locations!

## when repairing or installing:

- **switch off all energized leads!**
- secure appliance against resetting!
- **test for zero potential!**
- ground and short-circuit the appliance!





## 2. Vacuum equipment

### hazards:

implosion due to cracking windows or desiccators

- flying glass fragments
- suddenly evaporating cold gases

### prevention of accidents:

open vacuum valves **slowly**

act with **caution** near **windows**

regularly test windows and desiccators for **cracks**

never evacuate the He bath of cryostats  
without an intact isolation vacuum

avoid moving a cryostat when it is cold

# Vacuum equipment

<b>locations:</b>	MBE system, Balzers evaporation chamber, small evaporation chamber	0.1.38
	flow cryostat (laser system)	0.1.34
	liquid $^4\text{He}$ bath cryostat (MOKE)	0.1.13
	desiccators	

# 3. Cooling water

## hazards:

water damage

short circuits

fire due to blockage

## prevention of accidents:

check operability of **water monitor**

check **water flow** within the cooling circuits

regularly **check hose clamps** for tightness

**shut down** cooling circuits not in use

use only **fabric tubes** and always secure with **hose clamps**

# Cooling water

<b>locations:</b>	MBE system, Balzers evaporation chamber, small evaporation chamber	0.1.38
	electromagnet (magnet itself and power supply )	0.1.13, 0.1.34, 0.1.38
	laser system	0.1.34

# 4. Cryogenic gases and liquids

hazards:

extreme **frostbites**

danger of **suffocation**



prevention of accidents:



wear always safety **goggles**, protective **gloves**, and **mid-height** footwear, no shorts!



secure Dewars against **tilting**

keep liquid N<sub>2</sub> or <sup>4</sup>He vessels closed, check for ice blockage, check operability of overpressure valves



when refilling cryostat, beware of spilling liquid and keep door open (danger of **suffocation**)

**never** use **elevator** with a Dewar, a liquid N<sub>2</sub> or <sup>4</sup>He vessel inside (danger of **suffocation!**)

mark **cold areas** (exhaust pipes, feed lines)

# Hazard in handling cryogenic liquids: danger of suffocation

evaporating cryogenic liquids will displace oxygen in enclosed and poorly ventilated spaces.

danger will not be noticed because of the odorless nature of cryogenic gases

as a result, victim will first not suffer from shortage of breath

because the density is higher as compared to air, argon and cryogenic nitrogen will accumulate near the floor or in underground compartments

# Cryogenic gases and liquids

## locations:

liquid N<sub>2</sub> Dewar,  
liquid <sup>4</sup>He Dewar



0.1.38,  
0.1.34,  
0.1.13

flow cryostat (UHV MOKE,  
laser system)

0.1.38,  
0.1.34

liquid <sup>4</sup>He bath cryostat  
(MOKE)

0.1.13

liquid N<sub>2</sub> shield (MBE  
system, Balzers system)

0.1.38,

# 5. Gases and liquids under high pressure

## hazards:

may **explode** when heated

can **fly through concrete walls** when valve head is knocked off

## prevention

### of accidents:

**never** transport a gas cylinder **without relief cap!**

always use the **transport cart**



always **secure** gas cylinders **when standing** in place of location

**never** use a gas cylinder **without pressure reducing valve** (check for the correct type!)



if main valve **cannot** be **opened by hand**, return gas cylinder immediately

do **not completely empty** the gas cylinder and **mark** them as empty



# Gases and liquids under high pressure

<b>locations:</b>	transportable gas cylinders	0.1.38, 0.1.34, 0.1.13 0.1.27
-------------------	-----------------------------	--

# High-pressure xenon lamps

## hazards:

may **explode** in operation or when replaced  
causes **sunburn** when exposed to radiation  
**ozone** leads to **strong irritation** of respiratory system, possibly **carcinogenic!**

## prevention of accidents:

always wear **safety goggles** and protective **gloves** when handling high pressure lamps

**never** replace a **hot** lamp

do **not** store in **open space**

do **not** operate with an **open casing**

do not look into the beam without **UV goggles**

do not expose **bare skin** to the UV light

pay attention to **sufficient ventilation**



# Hazard with ozone

danger will not be noticed because ozone is smelled only during a few seconds

this leads to a long exposure to ozone without noticing it

as a consequence, strong irritation of the respiratory system will take place

Note: ozone is believed to be carcinogenic

# High-pressure xenon lamps

**locations:**

UV lamps (MOKE, UHV-  
MOKE, SNOM)

0.1.38,  
0.1.13,  
0.1.42

## 6. High magnetic field

### hazards:

**strong attraction** of paramagnetic metallic objects (screwdrivers, wrenches, Allen keys)

disturbs **cardiac pacemakers**



hazard of **fire** when magnet coils are not cooled

### prevention of accidents:

when in operation, check that **cooling water** is flowing through the magnet

when in operation, **never** approach with a **cardiac pacemaker**

**shut off** magnetic field when working with tools close to the magnet

# High magnetic fields

<b>locations:</b>	MOKE	0.1.13
	UHV-MOKE	0.1.38
	Laser system	0.1.34

# 7. Laser exposure

**hazards:**

**irradiation damages** of the **eyes**

burns of the **skin**

**prevention of accidents:**

do **not enter** the laser laboratory **without invitation** when the warning light is switched on




wear always **safety goggles** when the laser is switched on



do not expose **bare skin** to the laser light

# Laser wavelength ranges

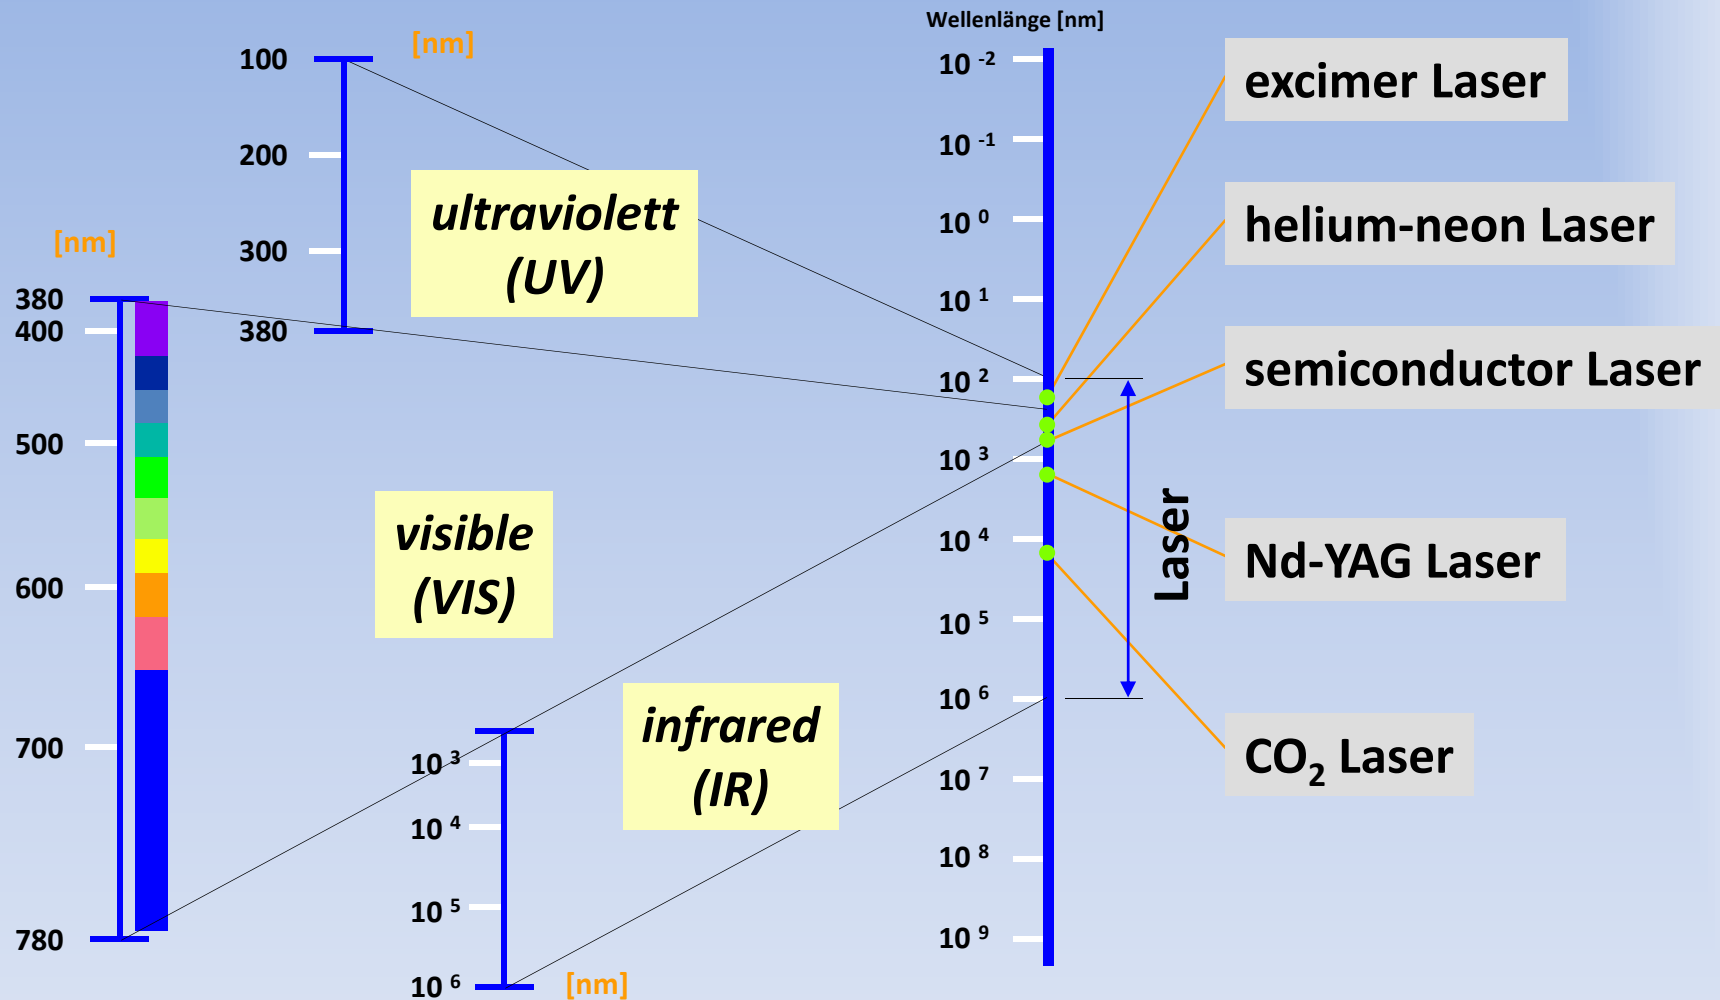




# Effect of laser irradiation

wavelength range		effect on the eye	effect on the skin	
100-315 nm	UV	keratitis	sunburn, accelerated aging	excimer laser
315-380 nm		cataract	increased pigmentation	
380-780 nm	VIS	lesion of the retina	shading of pigmentation, burns	He-Ne laser
780-1400 nm	IR	cataract, lesion of the retina		Nd-YAG laser
1400-3000 nm		cataract, burn of the cornea		high-power diode laser
3000-100.000 nm		burn of the cornea		CO <sub>2</sub> Laser

# Effect of laser irradiation - eye

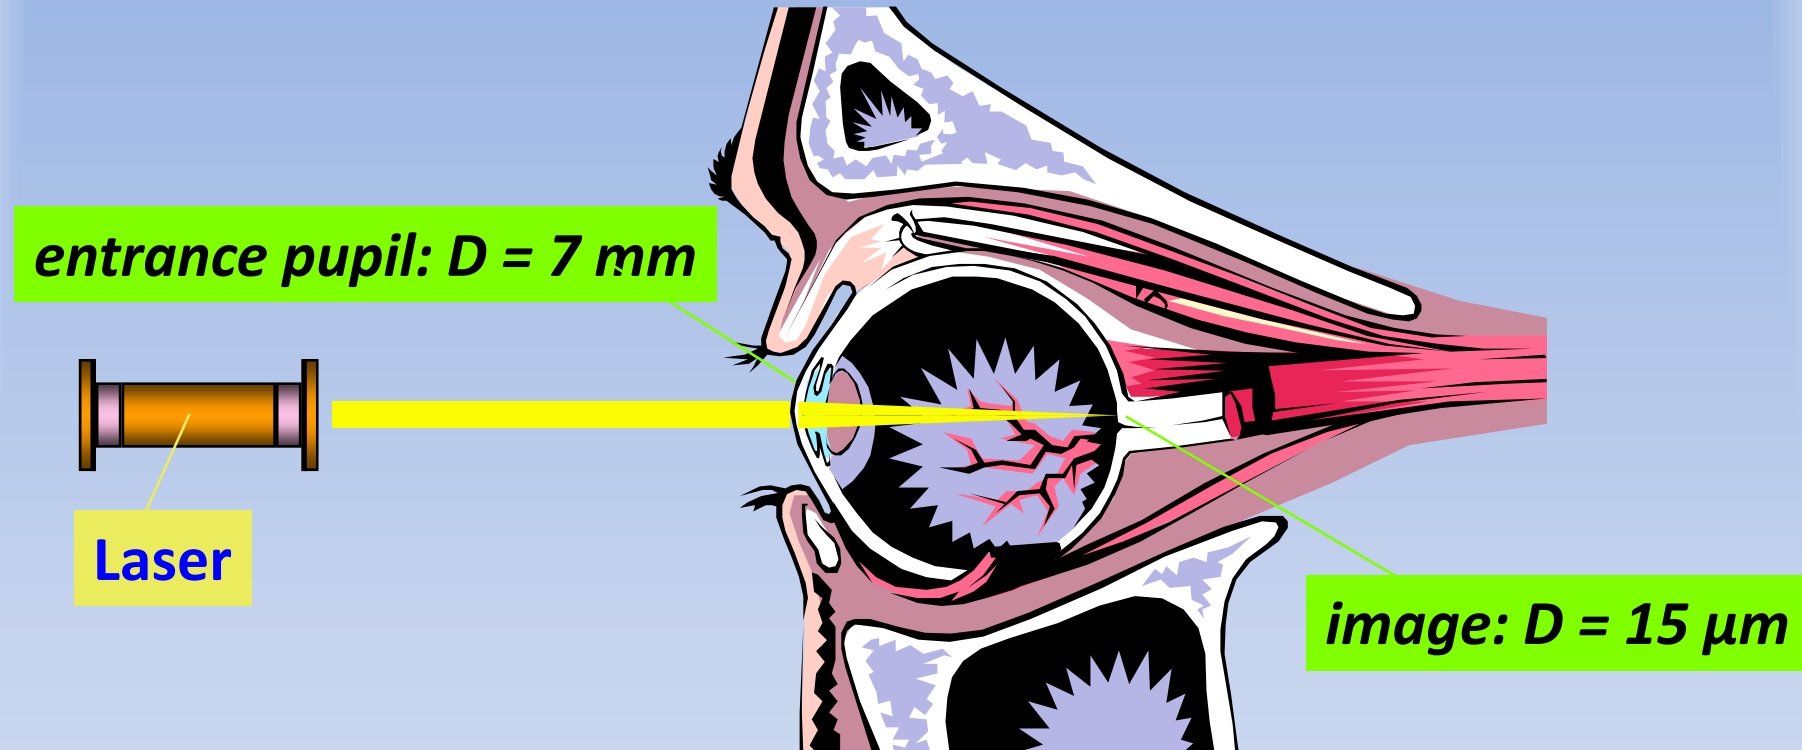

## Example:


energy density of  $1 \text{ mW/cm}^2$  (approx. 50% of the threshold of laser class 2) at the entrance pupil will be focused to  $200 \text{ W/cm}^2$  on the retina!

# Laser classes (1)

laser	risk potential
class 1	laser irradiation is not dangerous
class 1M	laser irradiation is not dangerous as long as <b>no optical instruments</b> such as magnifying glass or telescope are used.
class 2	laser irradiation is in the <b>visible range</b> and by <b>momentary irradiation</b> not dangerous for the eye ( <b>eyelid-closure reflex</b> ).
class 2M	like laser class 2 as long as <b>no optical instruments</b> are used.



class 1,2 und 1M, 2M: safe

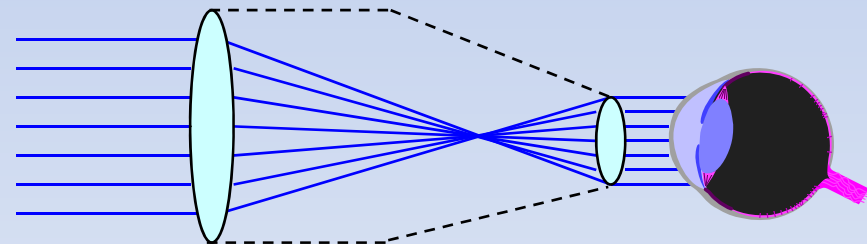

class 1,2: safe,  
class 1M,2M: dangerous

# Laser classes (2)

---

**laser**

**risk potential**

**class 3R**

laser irradiation is dangerous for the eye.

**class 3B**


laser irradiation is **dangerous** for the **eye** and in **special cases** also for the **skin**, **diffuse** reflections are **not** dangerous.

**class 4**


laser irradiation is **very dangerous** for the **eye** and for the skin, even **diffuse** reflections can be **dangerous**.

# Labeling of laser systems

---



**danger sign**




**add-on label with  
laser specifications**

for laser class 1 and 1M: instead of add-on label, power specifications can be incorporated in the operating manual

# Protection from laser irradiation

---

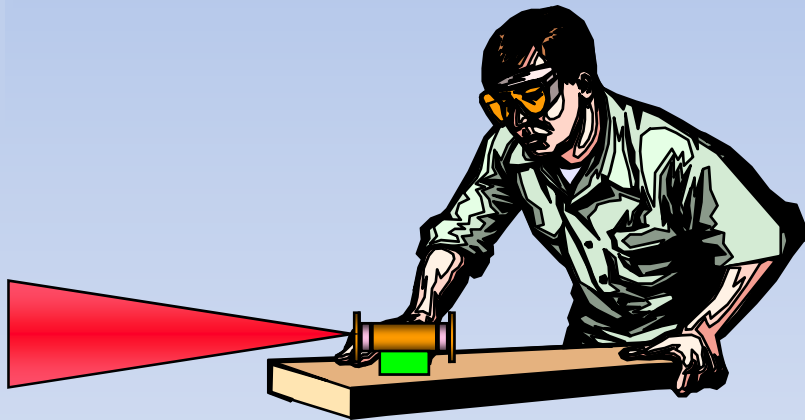

**screen laser beam**

**mark laser area**

**attenuate laser power to  
the actually required value**

**avoid entering the area of  
laser activity**

**use personal protective  
equipment (PPE)**

**never bring the head to beam level!!**

**never carry metals (ring, wrist watch, jewellery etc.)  
within the laser area, especially with laser class 3 and 4**

# Laser exposure

## locations:

Laser system

0.1.34

SNOM

0.1.42

MOKE (longitudinal)

0.1.13

## 8. X-ray exposure

**hazards:**

**irradiation damage** of the human body

**prevention of accidents:**

**never remove** protective **lead glass** on the UHV windows

**regularly check** X-ray source

do **not** operate when **pregnant**



# X-ray exposure

## locations:

electron-beam evaporators  
(MBE system, Balzers system,  
small evaporation chamber) 0.1.38

RHEED electron guns  
(MBE system, Balzers system) 0.1.38

SPA-LEED electron gun  
(MBE system) 0.1.38

sputter gun  
(MBE system) 0.1.38


# 9. Chemical-waste disposal

- responsible person for chemical waste bunker: Ms. Göpfer
- two bunker rooms: **combustible** and **noncombustible** chemicals
- **solvent** waste is collected in the chemical lab of the work groups in **5 l bins**
- **do not mix different types of solvents** as chemical violent chemical reactions may occur
- **every bin must be labeled with a proper label!** (labels are issued by Ms. Göpfer)

# Chemical-waste disposal


## Example of a waste label

name of the work group and person and date of disposal for better backtracking of origin of waste

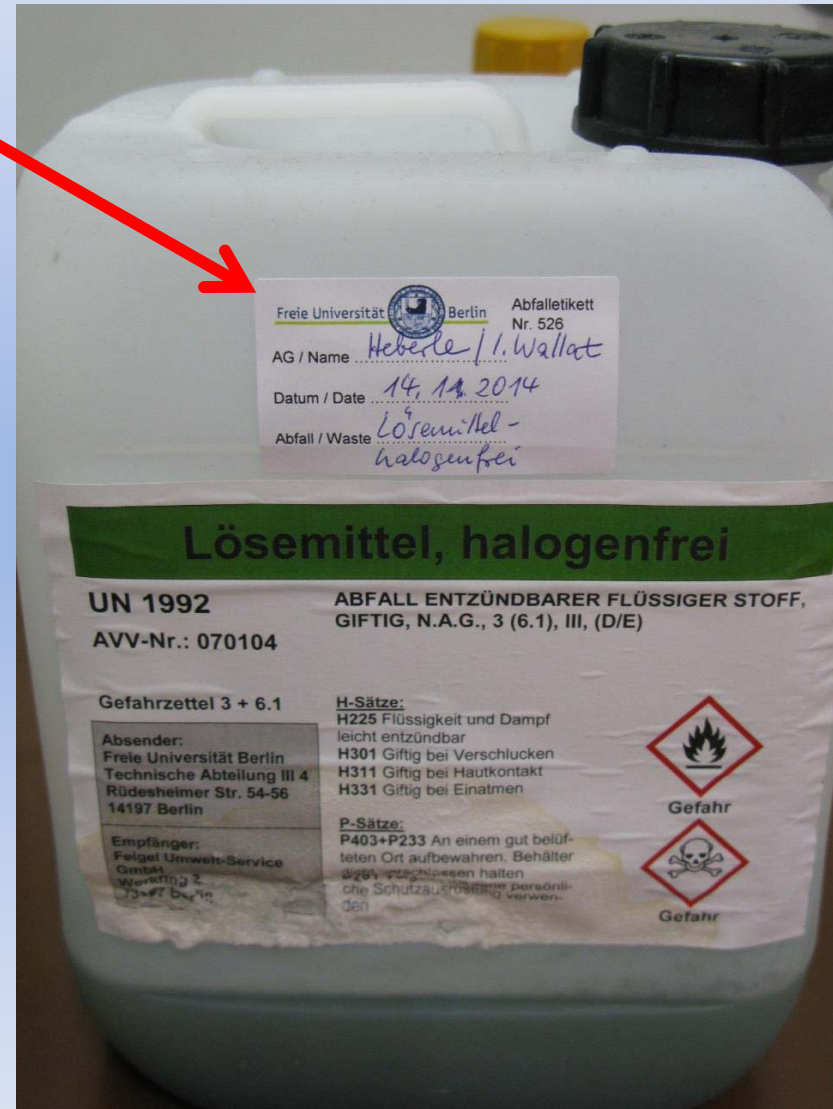

# Chemical-waste disposal

- full bins are then transferred to the chemical waste bunker.
- bins **without labels** or **improper** bins must not be placed in the chemical waste bunker! Please, contact Ms. Göper in this case
- bins **must no be filled beyond 90%** of the container volume in order to provide enough space for expansion of reaction gases
- do **not close the cap tightly** as long as chemical reaction are possible (in order for the reaction gases to be relieved)
- close tap **tightly before transferring** to the chemical waste bunker
- important: **don't hurry**, take your time
- further information:

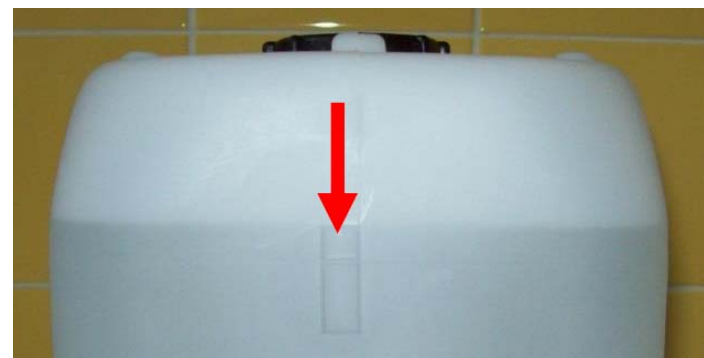

<http://www.bcp.fu-berlin.de/en/chemie/chemie/sicherheit/entsorgung/loesemittel/index.html>

# Chemical-waste disposal


## How to deliver bottles with waste solvents

**Never fill in more than 90 % of the total volume!**

Collected waste solutions may still react. Then a minimum of 10 % of the volume is needed as an expansion space.

Ensure that there is not reaction potential of your waste bottle:

1. Close it tightly and then agitate it forcefully.
2. Then open the cap a little to enable any developed gas to escape. Leave the bottle standing overnight.
3. Close the cap tightly. Ensure that the bottle is clean and not leaking. Deliver it to the "Materialverwaltung"

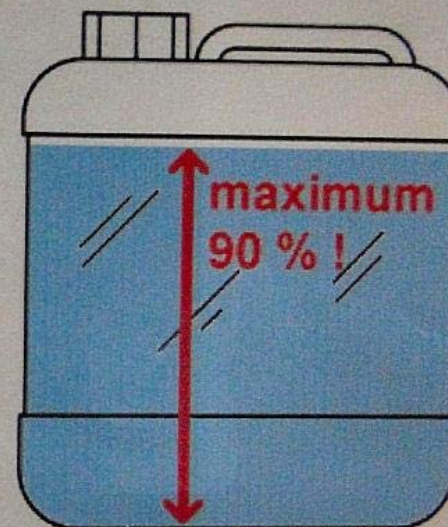

**Never put even traces of halogenated compounds to halogen-free waste solvents!**

# Chemical-waste disposal

## What to do if a bin is too full?

use a wash bottle with inverted rising pipe



or use a commercial filling tap provided with threads and pour the excess solvent out

